

Product Brochure For L469


Parting Blade

26 x 3mm

Ex GST
\$110.00

Inc GST
\$126.50

ORDER CODE:	L469
H:	26mm
B:	3mm
L:	110mm
Nett Weight (kg):	0.7

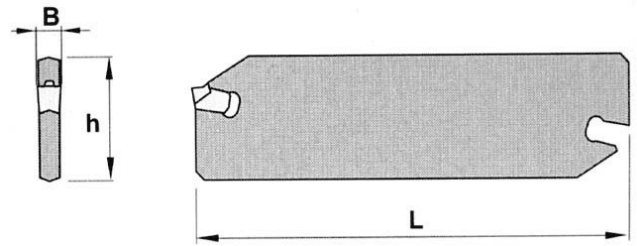

Description

To suit Kennametal inserts

Uses insert L0513


Features

- Blades have top and bottom V-prism design enabling greater clamping force preventing insert movement, even when cutting at high feed rates

Product Brochure For L469

Insert Stop Design

- Clamping pressure is increased when cutting forces increase providing secure holding power.
- The fixed insert stop provides solid seating with every index and provides up to 30% longer life.

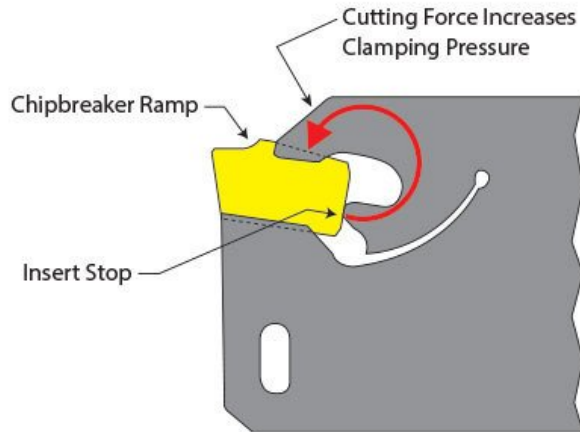

TECHNICAL INFORMATION

SETTING THE SPINDLE SPEED

To calculate the correct speed the following formula can be used.

$$\text{RPM} = \frac{1000 \times \text{Surface speed in Metres per Minute (M/min)}}{3.14 \times \text{Work Piece Diameter (mm)}}$$

Example 1.

20mm Mild Steel bar to be parted off.

$$\text{RPM} = \frac{1000 \times 80}{3.14 \times 20\text{mm}} = \frac{80000}{62.8} = 1273\text{rpm}$$

Example 2.

20mm Aluminium bar to be parted off.


$$\text{RPM} = \frac{1000 \times 100}{3.14 \times 20\text{mm}} = \frac{100000}{62.8} = 1592\text{rpm}$$

- Set the spindle speed to the closest RPM speed calculated
- If in doubt then set a speed slower than the calculated speed

SETTING THE TOOL ON CENTRE

For the tool to cut correctly it needs to be set on centre. This can be best achieved by placing a centre in the tailstock and adjusting the tool height to line up with centre point.

Correct Centre Height

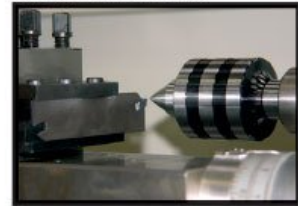

Approximate surface speeds for carbide tools

Material	Parting Off
Mild Steel	80 M/min
Cast Iron	70 M/min
Aluminium	100 M/min
Stainless Steel	60 M/min

Product Brochure For L469

Recommended Accessories

L0513

KENNAMETAL Carbide Inserts - Parting



L0511

KENNAMETAL Carbide Inserts - Grooving



L027

Parting Block - Suits 26mm Blade



L028

Parting Block - Suits 26mm Blade



L029

Parting Block - Suits 26mm Blade



L466

Professional Lathe Parting Tool Kit - Insert Type

