



Product Brochure For M455

Boring and Facing Head - VHU-160

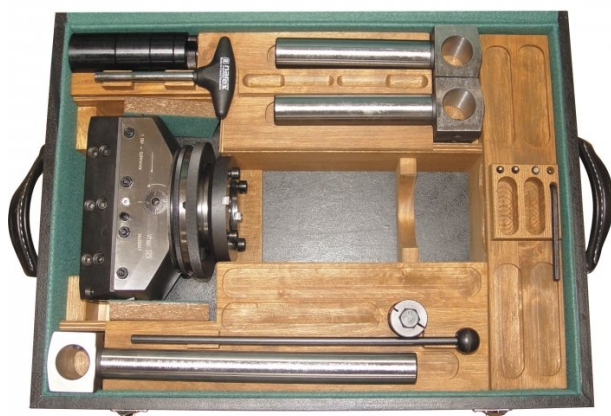

ORDER CODE:	M455
MODEL:	VHU-160
A (mm):	225
B (mm):	190
C (mm):	42
D (mm):	92
E (mm):	159

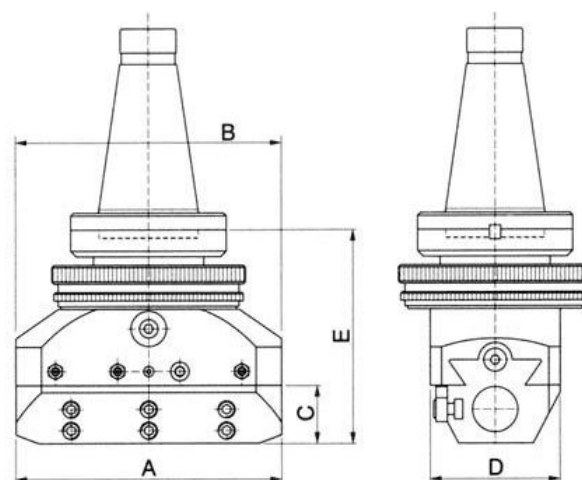

narex
Description

The VHU160 using a VHU125 body allowing 160mm of slide movement.

Now supplied in a wooden box, with primary accessories only including: extension bars, bushes, sleeves, and feed rod.

Please note: Cutting tools and Shanks sold separately

Features

- Accuracy of 0.01mm on diameter
- Auto feed on facing operations
- Rapid traverse for return movement of slide
- Manufactured in Europe



BASIC TECHNICAL DATA

MODEL:		VHU	36	56	80	110	125	160
Slide Motion	Max.(mm)	36	56	80	110	125	160	
Facing Diameter	Max.(mm)	230	320	380	430	610	690	
Boring Diameter	Max.(mm)	225	360	410	450	650	720	
Automatic Feed	(mm.rev-1)	0.02, 0.04, 0.06	0.05-0.10-0.15-0.20					
Hand Rapid Feed	(mm.rev-1)	3						4
Accuracy of Adjustment			 1 div. = 0.01mm/ø					
Diameter of Clamping Holes	dH8(mm)	16	25		32			
Weight of Head	(kg)	2.1	7.5	8.1	8.4	12.4	13.8	
Weight of Set	(kg)	5.3	18.6	19.0	19.5	33.0	34.3	

Product Brochure For M455

Specific Features



Boring Head