


Product Brochure For O003A

## ISO 68 Slideway Lube Oil - XDP-SW68

5 Litre

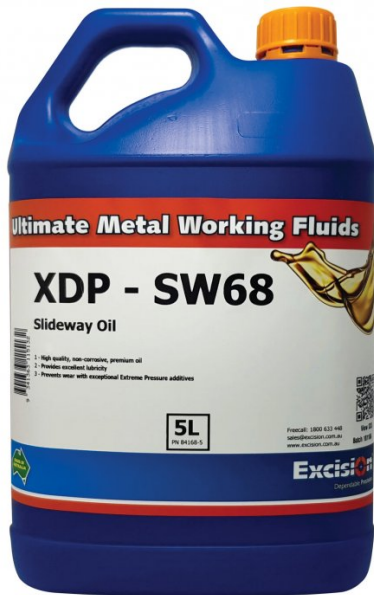

<b>Ex GST</b>	<b>Inc GST</b>
<b>\$74.00</b>	<b>\$85.10</b>

ORDER CODE:	O003A
Grade:	ISO 68
Size (Litre):	5
Application:	SLIDE WAY OIL
Suits:	~



### Description

XDP Slideway Oils are high performance slideway lubricants. They are recommended for both vertical and horizontal slideways and can be used for both metal and plastic slideways. Metalium Slideway Oils contain specialised additives to enhance the fluid load carrying capacity, providing quicker operation, reduced friction and less wear.

ISO grade: 68  
Density (15°C): 0,88 g/ml  
Viscosity (40°C): 68 cSt  
Viscosity (100°C): 9 cSt  
Viscosity Index: 106  
Flash point: >230°C  
Freezing point: -12°C  
Test 4 balls 40 Kg/1hour: 0.35 mm diameter

Store the product in an area with controlled temperature between 5° C and 40° C.  
Life in unopened packaging: 1 year

### Features

- Chloride, nitrate and silicone free
- Very high adhesion on metallic surfaces avoiding noises and vibrations.
- Anti-wear and high extreme-pressure properties to enable its use in gearboxes and mechanical transmission for tool-machines.
- Excellent protection against corrosion and oxidation
- DIN 51517 part 3 CLP standardisation meet