

Product Brochure For T885

Thermdrill - Cut Type For M6 - FD-C6

Sheet Metal Hole Forming Ready For Threading

Must See Video Demonstration

ORDER CODE:	T885
MODEL:	FD-C6
Type:	Thermdrill Cut
Size:	Suits M6
Material Thickness - Maximum (mm):	3
Recommended Speed - Mild Steel (rpm):	2000 - 2400
Recommended Speed - Stainless Steel (rpm):	1800 - 2160
Recommended Speed - Aluminium (rpm):	3600
Collet Sizes:	~



Description

Working with THERMDRILL gives you a significant increase of productivity by reduction of production time up to 50%

THERMDRILL is specially ground and made out of solid carbide. Generating friction heat while drilling it displaces the thin walled material without producing any chips


Within seconds it forms a bushing underneath the work-piece from the existing material

This extra thickness comes without any additional material or inserts and is now offering enough space for the threads which are introduced in the second step.


Features

- Steel - recommended 2,200 ~ 2,400rpm to produce correct form
- Stainless Steel - recommended 1,800 ~ 2,160rpm to produce correct form
- Aluminium - recommended 3,600rpm to produce correct form
- No more wobble, loosening or twist (like with rivet nuts)
- 100% no twist because it's made out of one piece
- Especially suitable for round tubes
- Secure hold also for sheet metal and special section tubes
- No waste because of chip-less process by using friction heat
- Better quality of the thread by thread forming instead of cutting (material solidification)
- Long life of the tools by polygonal grinding hard metal
- How it works. Stable threaded bushing in only two steps
- With the THERMDRILL method you create in seconds with only two steps extremely stable threaded bushings made out of one piece.
- Note: Requires thread shaper to form actual thread - (T891)

Product Brochure For T885

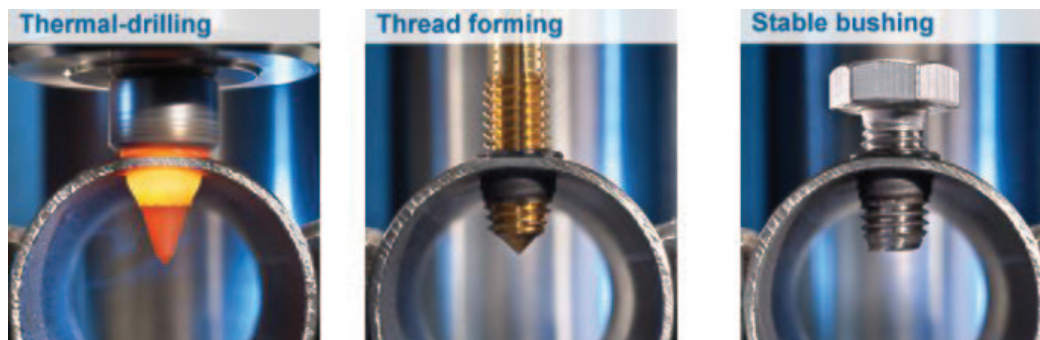

Specific Features



Thread Form (Requires Thread Shaper)