

Product Brochure For M450

Boring and Facing Head - VHU-36



Description

Now supplied in a wooden box, with primary accessories only including: extension bars, bushes, sleeves, and feed rod.


Please note: Cutting tools and Shanks sold separately

Features

- Accuracy of 0.01mm on diameter
- Auto feed on facing operations
- Rapid traverse for return movement of slide
- Manufactured in Europe




ORDER CODE:	M450
MODEL:	VHU-36
A (mm):	76
B (mm):	76
C (mm):	28
D (mm):	53
E (mm):	100

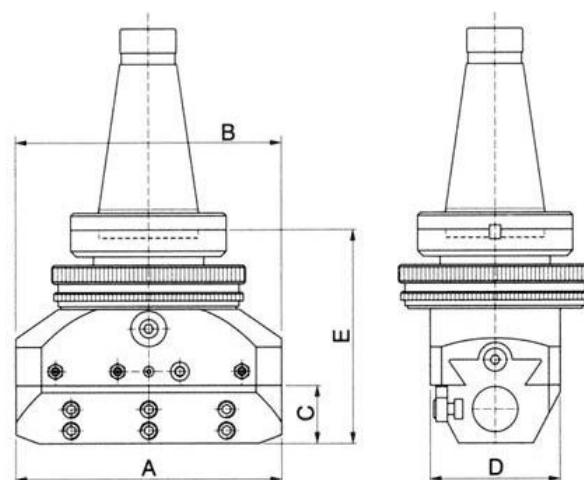

BASIC TECHNICAL DATA

MODEL:	VHU	36	56	80	110	125	160
Slide Motion	Max.(mm)	36	56	80	110	125	160
Facing Diameter	Max.(mm)	230	320	380	430	610	690
Boring Diameter	Max.(mm)	225	360	410	450	650	720
Automatic Feed	(mm.rev-1)	0.02, 0.04, 0.06	0.05-0.10-0.15-0.20				
Hand Rapid Feed	(mm.rev-1)	3					4

Accuracy of Adjustment



Diameter of Clamping Holes	dH8(mm)	16	25		32		
Weight of Head	(kg)	2.1	7.5	8.1	8.4	12.4	13.8
Weight of Set	(kg)	5.3	18.6	19.0	19.5	33.0	34.3

Product Brochure For M450

Specific Features



Boring Head