

Product Brochure For D721C

250mm Easson Digital Readout Scale

GS30 Compact Scale
5µm Resolution



Ex GST
\$244.00

Inc GST
\$280.60

ORDER CODE:	D721C
MODEL:	-
Type:	GS30 Compact Scale
Travel - Maximum (mm):	250
Overall Length (L) (mm):	394
Scale Resolution (µm):	5
Grating Pitch:	~
Accuracy (µm):	±6
Output Signal:	~
Connector:	~
Cable Length (Metre):	3
Working Temperature (°C):	~
Sealing Protection Class:	~
Maximum Speed (M/min):	~
Reference Point:	~
Width x Height (W x H) (mm):	20 x 28.5
Backing Support Plate (Yes / No):	Yes




Description

Easson GS series Glass Grating Linear Transducer: EASSON - Always committed to Quality, Technology & Innovation

Features

- **SINGLE SEAL DESIGNED SCALES:**
- The plastic seals of the transducer use an innovative material to offer superior oil resistance, high elastic recovery properties and durability, carefully designed lip geometry offer low slide resistance.
- **100% LASER CALIBRATION:**
- All glass grating transducers are individually inspected and calibrated by our in-house laser calibrator to ensure accuracy complies 100% with the specifications.
- **ADVANCED OPTICAL MEASURING SYSTEM:**
- The slide carrier of the GS series scales, use a five bearing design for optical grating linear transducer which has been proven as the most reliable system design in today's market.
- The glass grating slide-ways are lapped, and JIS standard P5 grade bearings are used to achieve smooth and accurate movement and long working life.
- **D.I.Y. INSTALLATION:**
- An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

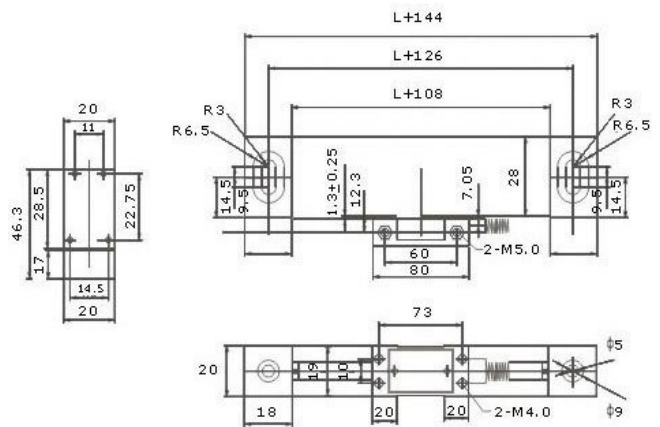

GS30 from 50mm to 500mm

Product Brochure For D721C

MODEL	VS 10	
Measuring Standard	Glass scale - Grating	
Optical Detecting System	Transmissive Infrared	
Slide Carrier System	Vertical five bearing supporting system	45° support
Resolution	5μm	
Measurement Travel (100-1200mm)	Every 50mm per length specification	
Measurement Travel (1300-3000mm)	-	Every length
Accuracy (100-450mm) Accuracy (500-1000mm) Accuracy (1050-1250mm) Accuracy (1300-3000mm)	±3 - ±5μm ±10μm ±10μm -	
Repeatability	2μm	
Hysteresis	3μm	
Protection	DIN	
Power Supply	DC	
Output Signals		

Product Brochure For D721C

Specific Features



DSub9 Male Plug

Dsub 9
9 pin male connector plug

Pin	ITL Signal Cable	422A Signal Cords
1	—	A Yellow
2	0V Orange	0V White
3	—	B Red
4	Gnd Ground	Gnd Ground
5	—	R Black
6	A Yellow	A Green
7	5V Red	5V Brown
8	B Green	B Blue
9	R Brown	R Gray

Dsub9 Wiring Diagram



D.I.Y. INSTALLATION
An easy-to-follow D.I.Y. Installation Manual is supplied with each system, complete with illustrations and mounting brackets.

DIY Installation

Recommended Accessories

D709

Easson Scales - Extension Cable



D710

Easson Scales - Extension Cable



D772

Digital Readout Scale Mounting Bracket Kit

